



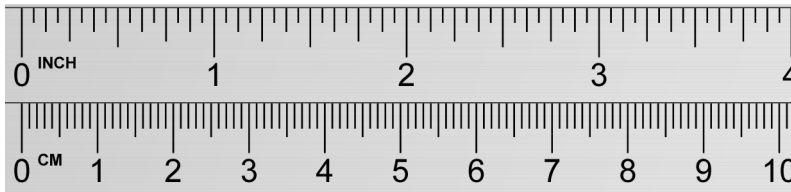

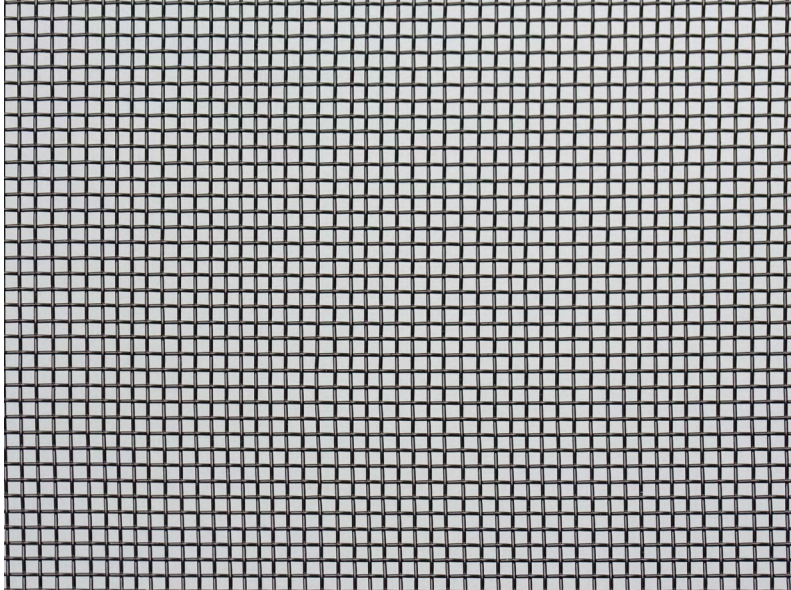

PARENT PRODUCT CODE

USSWOB 00657 - - - -

See table below for complete product codes




This document is to scale when printed to A4 with no scaling applied. Please use ruler above to check your scale. Images are provided as a guide only.

-  Application Pages
-  Care Page
-  Glossary Page
-  Testing Page

U.S / METRIC

Aperture 0.0657" / 1.67 mm
Wire Diameter 0.0177" / 26 SWG / 0.45mm












Finish Black Powder Coat
Weave Type Plain Weave
Approx Weight 0.2539 lbs/ft²
1.24 kg/m²
Approx % Open Area* 62 %

* Pre black powder coat finish

TESTING / STANDARDS

Mesh is Tested / Manufactured to*

-  **UL 723 / ASTM E84**
Standard Test Method for Surface Burning Characteristic of Building Materials ✓ Class A Fire Rated Building Material Extended Test - 30 min flame exposure
-  **ASTM E2016-15**
Standard Specification for Industrial Woven Wire Cloth ✓ Manufactured to
-  **AS 3959-2018**
Construction of Buildings in Bushfire Prone Areas ✓ Aperture < 2mm Corrosion Resistant Non Combustible
-  **AS 2331 1.3.1 2001**
Neutral Salt Spray Test ✓ 1000 Hours No Corrosion
-  **FCO-3313 Rev B**
CSIRO Advisory Report regarding 'Bushfire Mesh' range & criteria of AS 3959-2018 ✓ BAL 12.5 - FZ if used in the prescribed construction manner
-  **AS/NZS 1530.3:1999**
Simultaneous Determination of ignitability, flame propagation, heat release and smoke release ✓

PRODUCT CODE	GRADE	 Width U.S / Metric	 Length U.S / Metric	 Diam. U.S / Metric	APPROX Weight/Roll U.S / Metric
USSWOB 00657 0756 100	316	7.5" / 190 mm	100' / 30 m	8.7" / 220 mm	15.43 lbs / 7 Kg
USSWOB 00657 3606 50	316	36" / 915 mm	50' / 15 m	5.5" / 140 mm	37.48 lbs / 17 Kg
USSWOB 00657 3606 100	316	36" / 915 mm	100' / 30 m	8.7" / 220 mm	74.86 lbs / 34 Kg
USSWOB 00657 4906 50	316	49" / 1245 mm	50' / 15 m	5.5" / 140 mm	50.71 lbs / 23 Kg
USSWOB 00657 4906 100	316	49" / 1245 mm	100' / 30 m	8.7" / 220 mm	101.41 lbs / 46 Kg
USSWOB 00657 6006 50	316	60" / 1550 mm	50' / 15 m	5.5" / 140 mm	63.93 lbs / 29 Kg
USSWOB 00657 6006 100	316	60" / 1550 mm	100' / 30 m	8.7" / 220mm	127.87lbs / 58 Kg

